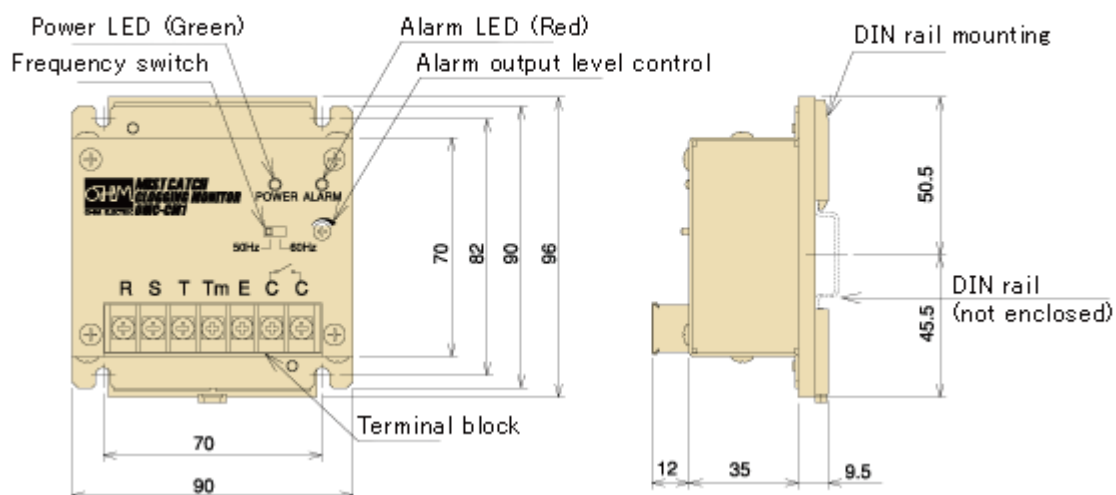


**► Specifications**

Model	OMC-CM1	
Rated voltage	Three phase 200VAC	
Power consumption	2W	
For use with	OMC-11, OMC-12A	
Alarm detection level	nonstep setting by a fine adjustable control ranging from 10 % to 50% of the maximum air volume	
Contact capacity	Resistance load	AC250V 3A, DC30V 3A
	Induction load	AC250V 1A, DC30V 1A ( $\cos\theta=0.4$ , L/R=7ms)
Working temperature	+5 to +50°C	
Working humidity	20%RH to 80%RH (Free from condensation)	
Terminal screw	M4 screw with square washer, 8 pcs.	
Internal protection fuse	AC250V 0.5A	
Environmental standard	-	
Weight	300g	
Accessories	Instructions manual	

**► Dimensions (in mm)****► Connection diagram**