



# CAPCON OA-W series

G3/8 thread

## For $\phi 17$ entry hole

# IP67

### Long-awaited new line!

#### CAPCON Lineup


**NEW**

Model	Entry hole
OA-W15M	$\phi 15$
<b>OA-W3/8G</b>	<b><math>\phi 17</math></b>
OA-W16	$\phi 21$
OA-W22	$\phi 28$
OA-W28	$\phi 34$
OA-W36	$\phi 42$



Finally launched responding to customers' demand!  
Expanded lineup meets broader application

# Entry hole $\phi 17\text{mm}$ Thread G3/8

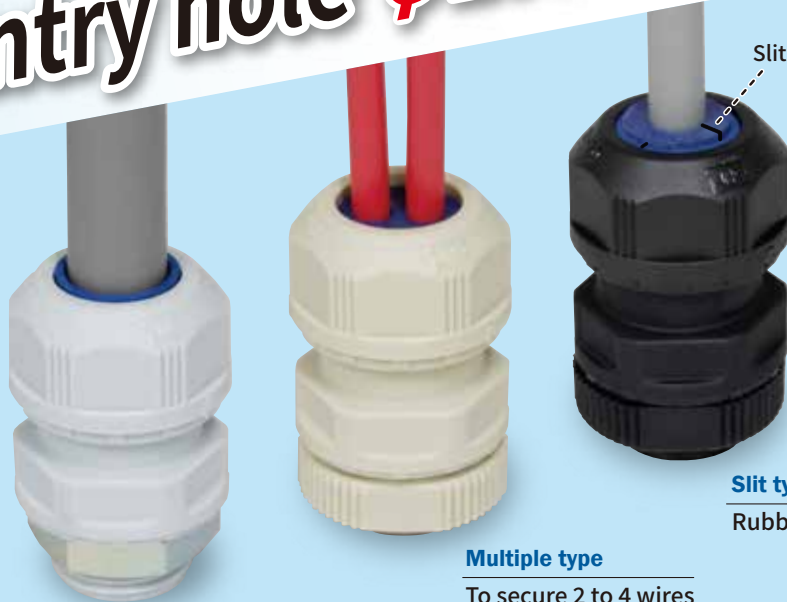

**1 hole type**  
To secure single wire

**Multiple type**  
To secure 2 to 4 wires

**Slit type**  
Rubber bushing has a slit

All **60** models  
Rich lineup offers freedom of choice

**RoHS2**



# OHM ELECTRIC CO., LTD.

## Model/Specifications

### Single type

Weatherproof Rubber bushing : Blue O ring : Blue

Model			Applicable cable dia. (mm)	Entry hole dia. (mm)	Thread	Max. plate thickness	Working temp.	Weight	Q'ty/pack
Black	Light gray	Beige							
OA-W3/8G-04/09E	OA-W3/8G-04/09EC1	OA-W3/8G-04/09EB	φ 4-9 <sup>①</sup>	φ 17	G3/8	4mm	-25 to +80°C	12g	20 pcs.
OA-W3/8G-06/09E	OA-W3/8G-06/09EC1	OA-W3/8G-06/09EB	φ 6-9					11g	
OA-W3/8G-09/11E	OA-W3/8G-09/11EC1	OA-W3/8G-09/11EB	φ 9-11					10g	

Oilproof Rubber bushing : Black O ring : Black

Model			Applicable cable dia. (mm)	Entry hole dia. (mm)	Thread	Max. plate thickness	Working temp.	Weight	Q'ty/pack
Black	Light gray	Beige							
OA-W3/8G-04/09	OA-W3/8G-04/09C1	OA-W3/8G-04/09B	φ 4-9 <sup>①</sup>	φ 17	G3/8	4mm	-25 to +80°C	12g	20 pcs.
OA-W3/8G-06/09	OA-W3/8G-06/09C1	OA-W3/8G-06/09B	φ 6-9					11g	
OA-W3/8G-09/11	OA-W3/8G-09/11C1	OA-W3/8G-09/11B	φ 9-11					10g	

### Multiple type

Weatherproof Rubber bushing : Blue O ring : Blue

Model			Applicable cable dia. (mm)	No. of holes	Entry hole dia. (mm)	Thread	Max. plate thickness	Working temp.	Weight	Q'ty/pack
Black	Light gray	Beige								
OA-W3/8G-0334E	OA-W3/8G-0334EC1	OA-W3/8G-0334EB	φ 2.2-3.3	4	φ 17	G3/8	4mm	-25 to +80°C	12g	20 pcs.
OA-W3/8G-0402E	OA-W3/8G-0402EC1	OA-W3/8G-0402EB	φ 3-4	2					12g	

Oilproof Rubber bushing : Black O ring : Black

Model			Applicable cable dia. (mm)	No. of holes	Entry hole dia. (mm)	Thread	Max. plate thickness	Working temp.	Weight	Q'ty/pack
Black	Light gray	Beige								
OA-W3/8G-0334	OA-W3/8G-0334C1	OA-W3/8G-0334B	φ 2.2-3.3	4	φ 17	G3/8	4mm	-25 to +80°C	12g	20 pcs.
OA-W3/8G-0402	OA-W3/8G-0402C1	OA-W3/8G-0402B	φ 3-4	2					12g	

### Slit type

Weatherproof Rubber bushing : Blue O ring : Blue

Model			Appl. conector O.D. (mm)	Appli. cable dia. (mm)	No. of holes	Entry hole dia. (mm)	Thread	Max. plate thickness	Working temp.	Weight	Q'ty/pack
Black	Light gray	Beige									
OA-W3/8G-04/09RSE	OA-W3/8G-04/09RSEC1	OA-W3/8G-04/09RSEB	φ 11 or less	φ 4-9 <sup>①</sup>	1	φ 17	G3/8	4mm	-25 to +80°C	12g	20 pcs.
OA-W3/8G-06/09RSE	OA-W3/8G-06/09RSEC1	OA-W3/8G-06/09RSEB		φ 6-9	1					11g	
OA-W3/8G-09/11RSE	OA-W3/8G-09/11RSEC1	OA-W3/8G-09/11RSEB		φ 9-11	1					10g	
OA-W3/8G-0334RSE	OA-W3/8G-0334RSEC1	OA-W3/8G-0334RSEB		φ 2.2-3.3	4					12g	
OA-W3/8G-0402RSE	OA-W3/8G-0402RSEC1	OA-W3/8G-0402RSEB		φ 3-4	2					12g	

Oilproof Rubber bushing : Black O ring : Black

Model			Appl. conector O.D. (mm)	Appli. cable dia. (mm)	No. of holes	Entry hole dia. (mm)	Thread	Max. plate thickness	Working temp.	Weight	Q'ty/pack
Black	Light gray	Beige									
OA-W3/8G-04/09RS	OA-W3/8G-04/09RSC1	OA-W3/8G-04/09RSB	φ 11 or less	φ 4-9 <sup>①</sup>	1	φ 17	G3/8	4mm	-25 to +80°C	12g	20 pcs.
OA-W3/8G-06/09RS	OA-W3/8G-06/09RSC1	OA-W3/8G-06/09RSB		φ 6-9	1					11g	
OA-W3/8G-09/11RS	OA-W3/8G-09/11RSC1	OA-W3/8G-09/11RSB		φ 9-11	1					10g	
OA-W3/8G-0334RS	OA-W3/8G-0334RSC1	OA-W3/8G-0334RSB		φ 2.2-3.3	4					12g	
OA-W3/8G-0402RS	OA-W3/8G-0402RSC1	OA-W3/8G-0402RSB		φ 3-4	2					12g	

Note: The applicable cable size marked with ① changes by combination of rubber bushings.

• Rubber bushing A+B 


A	+	B
---	---	---

 • Rubber bushing A only 


A
---

①	Appli. cable dia. (mm)
Rubber bushing A+B	φ 4-6
Rubber bushing A only	φ 6-9

## Dimensional drawing

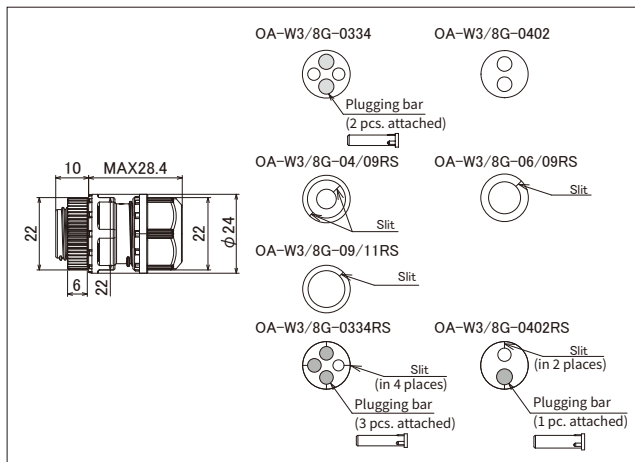

## Materials

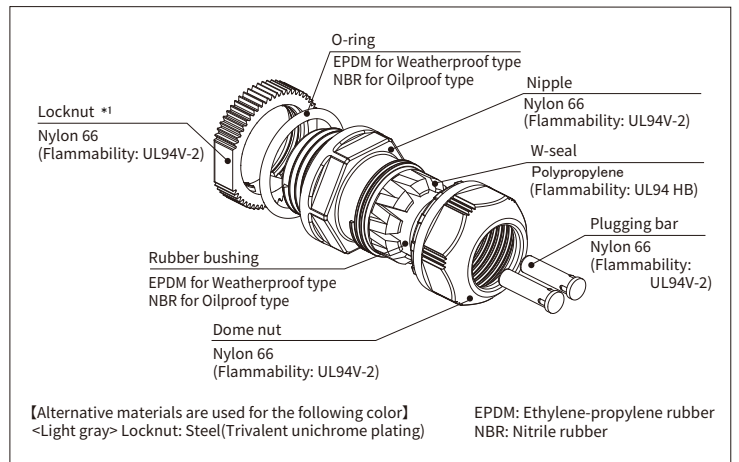

**OHM ELECTRIC CO., LTD.**  
OHM ELECTRIC

7000-21, Nakagawa, Hosoe, Kita-ku, Hamamatsu, Shizuoka 431-1304, Japan  
TEL +81-53-522-5562 FAX +81-53-523-2362 e-mail : info@ohm.co.jp

URL : <https://www.ohm.jp/>

The contents of this catalog are subject to change for product improvement.  
Colors of products may slightly differ from actual due to printing.