




QUICK CAP OA-QW SERIES

# Slitted type

New models released




Protection



LAN Connector

Relay adaptor

**Waterproof and dustproof !**  
**For insulating LAN cables or other preassembled connectors**

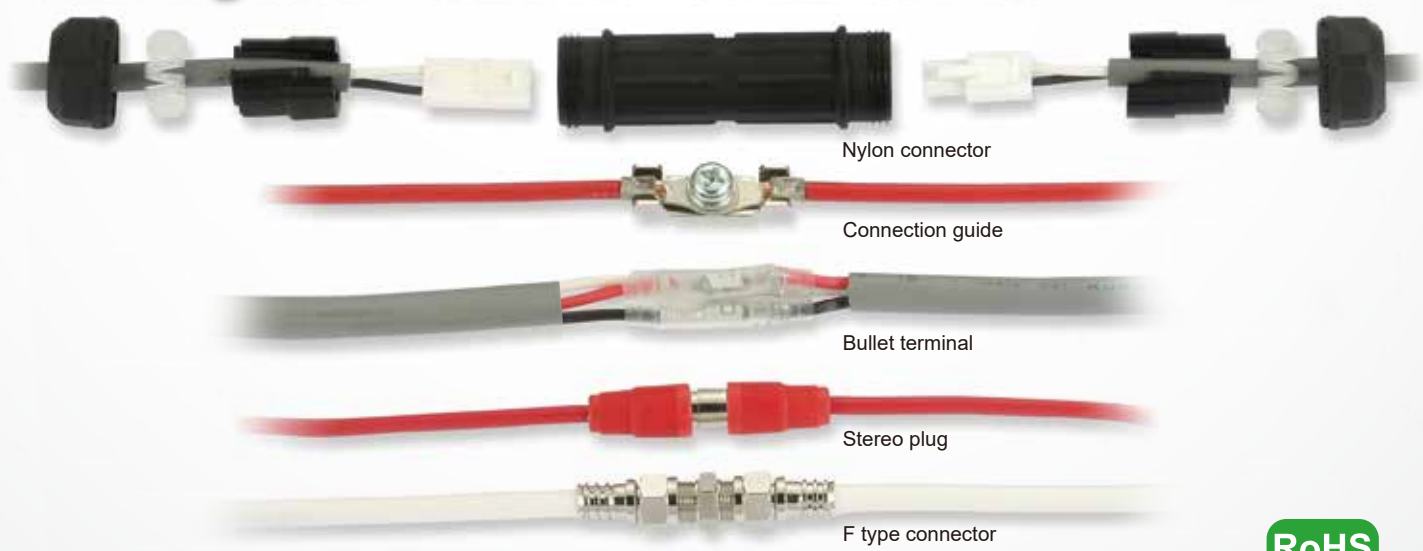

Nylon connector

Connection guide

Bullet terminal

Stereo plug

F type connector



■ Model/Specification ■ Oilproof ■ Rubber bushing: Black ■ Weatherproof ■ Rubber bushing: Blue

| Model                       | Rated Voltage | Applicable cable dia (mm) |                     | Working temp. | Inner space (mm) | Weight | Q'ty per package | Option  |
|-----------------------------|---------------|---------------------------|---------------------|---------------|------------------|--------|------------------|---|
|                             |               | Left                      | Right               |               |                  |        |                  |   |
| OA-QW09SRSN                 | AC/DC<br>600V | φ 4 to 9                  | φ 4 to 9            | -25 to +80°C  | φ 14.6 × 50      | 25g    | 10 pcs           | Fitting bracket<br>QW-H2<br>Connection guide<br>QW-J1<br>QW-J2<br>QW-J3 |
| OA-QW11SRSN                 |               | φ 8.5 to 11.5             | φ 8.5 to 11.5       |               |                  | 21g    |                  |   |
| OA-QW0911SRSN               |               | φ 4 to 9                  | φ 8.5 to 11.5       |               |                  | 23g    |                  |   |
| OA-QW09334SRSN              |               | φ 4 to 9                  | φ 22 to 33(4 holes) |               |                  | 25g    |                  |   |
| OA-QW09404SRSN              |               | φ 4 to 9                  | φ 3 to 4 (4 holes)  |               |                  | 25g    |                  |   |
| OA-QW11334SRSN              |               | φ 8.5 to 11.5             | φ 22 to 33(4 holes) |               |                  | 23g    |                  |   |
| OA-QW11404SRSN              |               | φ 8.5 to 11.5             | φ 3 to 4 (4 holes)  |               |                  | 23g    |                  |   |
| OA-QW22-0801SRSN <b>NEW</b> |               | φ 5 to 8                  | φ 5 to 8            |               |                  | 55g    |                  |   |


※1 Please refer to the "Inner space" in "Dimensions".




**OHM ELECTRIC CO., LTD.**

## How to select a model

Refer to "Inner space" and "Applicable cable dia." in Model/Specification. Select a model suitable for your preassembled connector size and cable diameter.



Max. diagonal dimension should be within the inner space of product dimension.

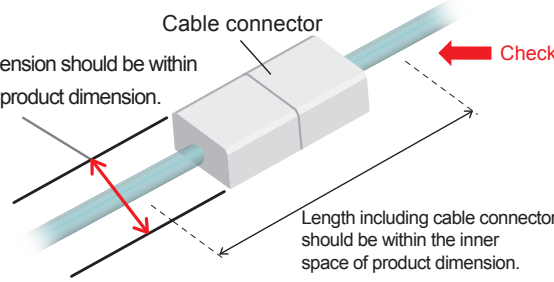


Check the applicable cable dia.

| OA-QW22-0801SRSN<br>Reference for LAN cable relay adaptor |              |          |
|---|--------------|----------|
| Maker   | Model        | Category |
| ELECOM CO.,LTD  | LD-RJ45JJ5Y2 | CAT5e    |
| ELECOM CO.,LTD  | LD-RJ45JJ6Y2 | CAT6     |


**[Caution]** Make sure that the latches are not pushed when using LAN cables.

## Procedure


- Disjoint OA-QW, then remove dome nuts and W seals from rubber bushing. Disconnect the cable connector and pass one cable through dome nuts and W seals as the picture shows.

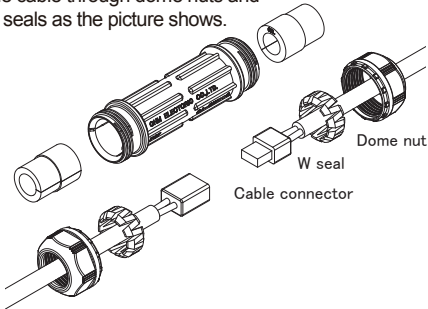


- Open the slit of rubber bushing and cover the cable. Then, let the W seal through the cable.

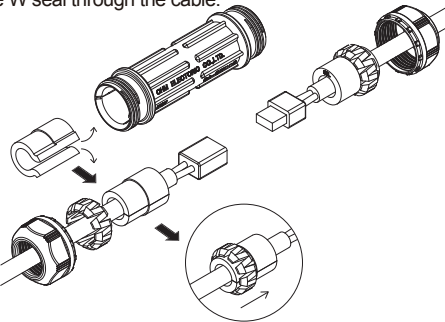


- Insert the other cable through body and connect the cable connector.

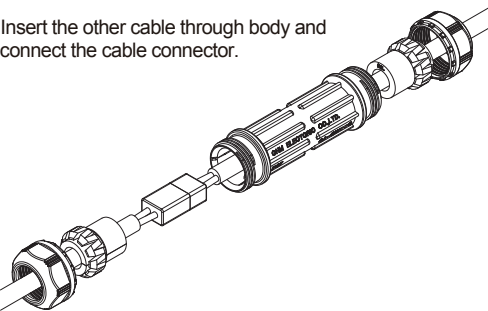


- Tighten the dome nuts and fix the cable.

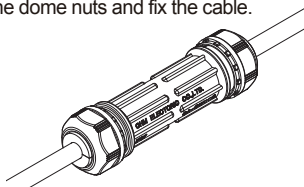



## Dimensions

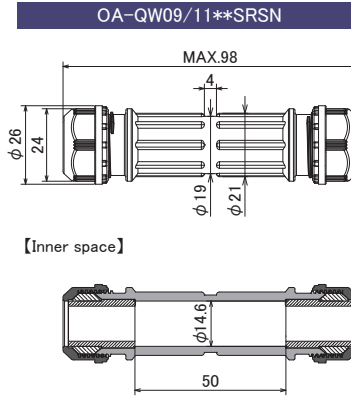


【Inner space】

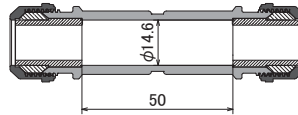


< Shape of rubber bushing >

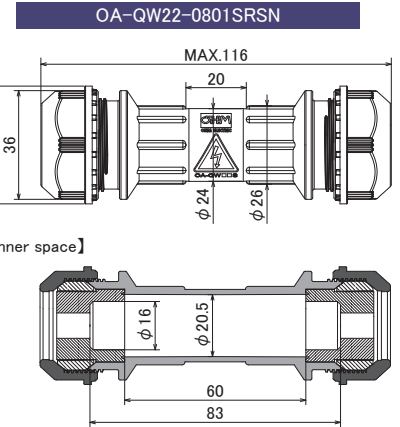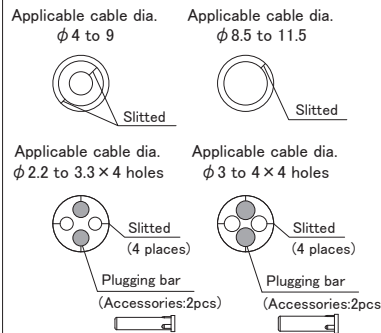


【Inner space】

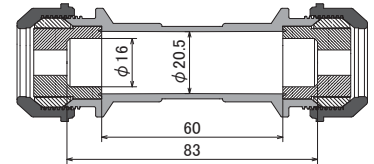


【Max. inner space in using φ5 cable】

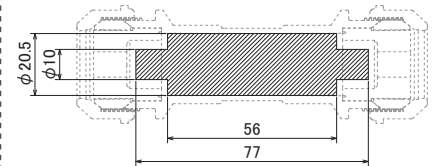

< Shape of rubber bushing >



## Material

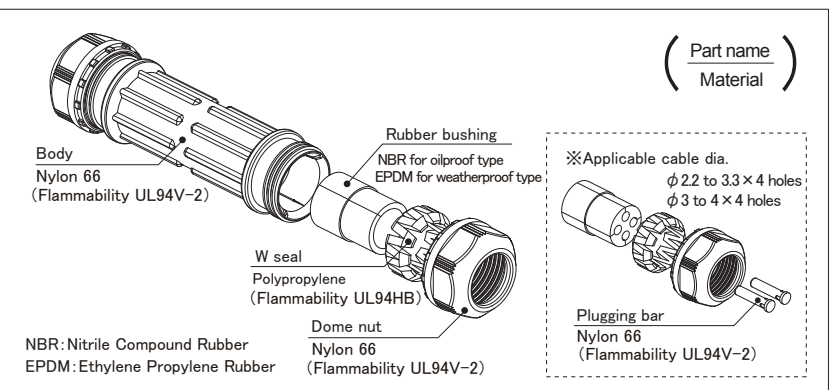

# OHM ELECTRIC CO., LTD.

7000-21 Nakagawa, Hosoe, Kita-ku  
Hamamatsu, Shizuoka 431-1304, JAPAN  
TEL : +81-53-522-5562 FAX: +81-53-523-2362  
e-mail : info@ohm.co.jp

URL : <http://www.ohm.jp/>

● The contents of this brochure are subject to change for product improvements.  
● Colors of the images might be slightly different from ones of real products.

OHM News vol.175