



CAPCON OA-WW series

Wide type



Lineup expanded!

RoHS2

$\phi 11 \sim \phi 20$

CTG22 screw type added!

$\phi 4 \sim \phi 12$

$\phi 8 \sim \phi 15$

PAT.P



Oilproof Weatherproof



Bestseller

OA-WW16-04/12B


NEW

OA-WW22-11/20

Bestseller

OA-WW16-08/15

Meets broad range cable sizes!

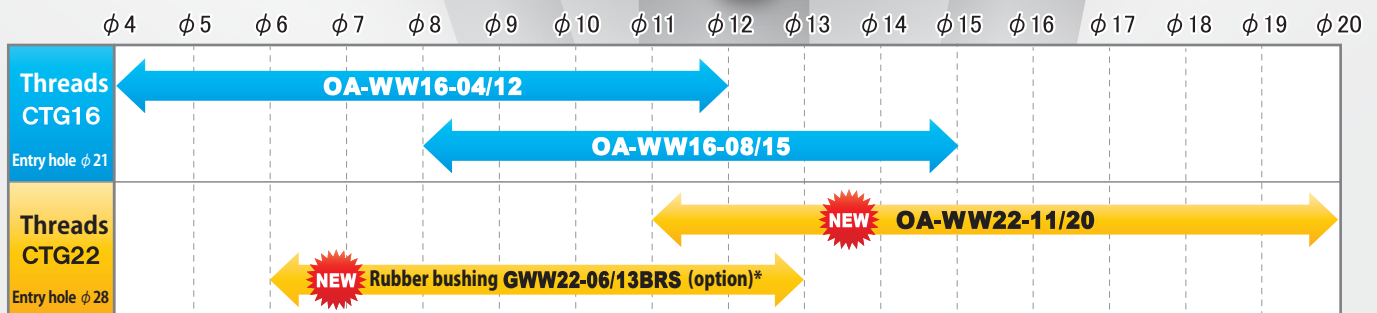

*Rubber bushing specially for OA-WW22-11/20 (option)





OHM ELECTRIC CO., LTD.



1903 O-01

Model/Specifications


■ Oilproof Rubber bushing : Black O ring : Black

	Model		Applicable cable dia. (mm)	Entry hole dia. (mm)	Threads	Max. plate thickness	Working temp.	Weight	Q'ty/pack
	 Black	 Beige							
on sale	OA-WW16-04/12	OA-WW16-04/12B	$\phi 4 \sim \phi 12$	$\phi 21$	CTG16 (G1/2)	4 mm or less	-25 to +80 °C	15 g	20 pcs.
	OA-WW16-08/15	OA-WW16-08/15B	$\phi 8 \sim \phi 15$					17 g	
NEW	OA-WW22-11/20	OA-WW22-11/20B	$\phi 11 \sim \phi 20$	$\phi 28$	CTG22 (G3/4)	6 mm or less		34 g	10 pcs.


■ Weatherproof Rubber bushing : Blue O ring : Blue

	Model		Applicable cable dia. (mm)	Entry hole dia. (mm)	Threads	Max. plate thickness	Working temp.	Weight	Q'ty/pack
	 Black	 Beige							
on sale	OA-WW16-04/12E	OA-WW16-04/12EB	$\phi 4 \sim \phi 12$	$\phi 21$	CTG16 (G1/2)	4 mm or less	-25 to +80 °C	15 g	20 pcs.
	OA-WW16-08/15E	OA-WW16-08/15EB	$\phi 8 \sim \phi 15$					17 g	
NEW	OA-WW22-11/20E	OA-WW22-11/20EB	$\phi 11 \sim \phi 20$	$\phi 28$	CTG22 (G3/4)	6 mm or less		34 g	10 pcs.


Clamping structure

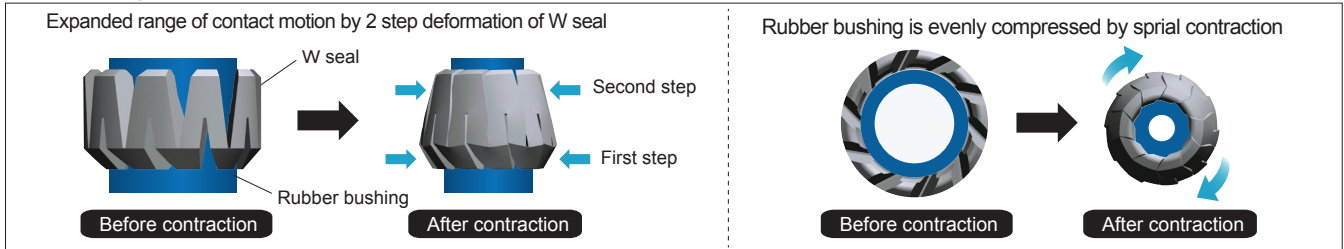


Dimensional drawing

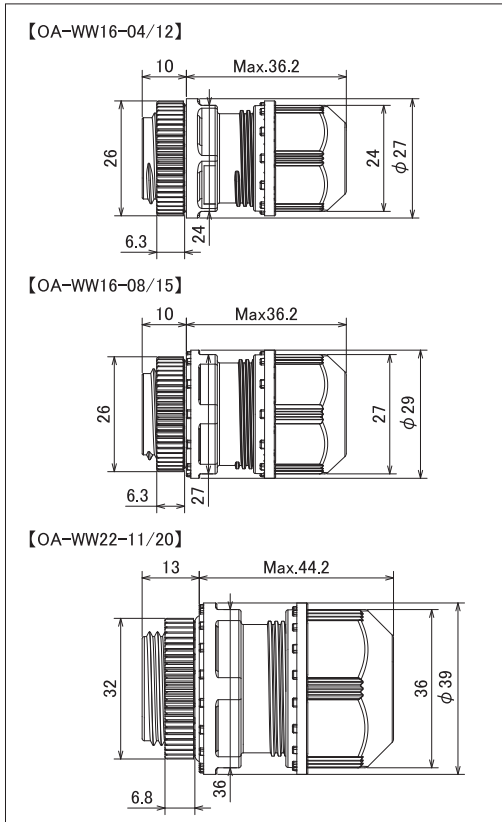

Option (Rubber bushing)

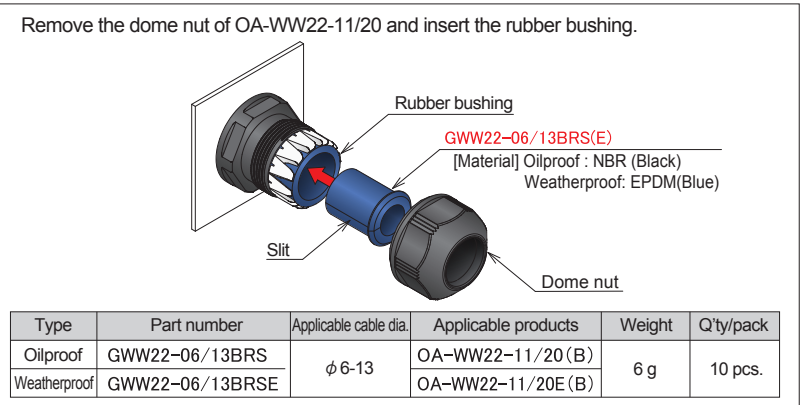

Material

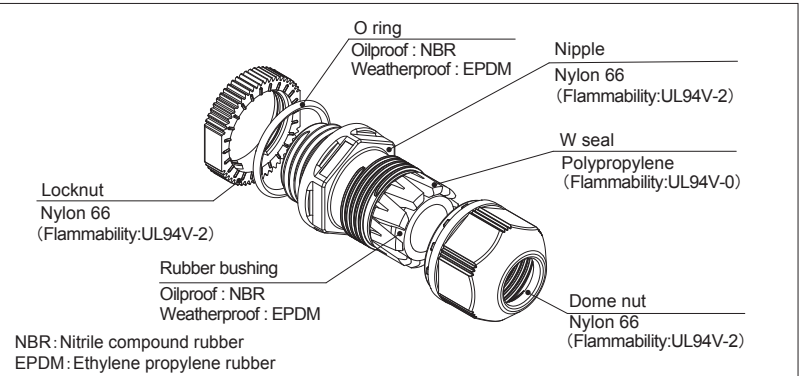

Instructions for use

[For pre-threaded holes on Limit switches etc.] When mounting on female thread, remove the locknut and mount CAPCON on smooth surface without twisting O ring.

- Use only one cable for one hole.
- Tightening torque and tensile strength differ depending on coating material and hardness of the cable.
- Tensile strength and waterproof performance declines if cable sheath gets thin with age.
- Use round cables of specified size only. Product performance is not secured for flat cables or any other cables than specified.
- If the nipple rotates while tightening the dome nut, fix them with a wrench and tighten the dome nut.

OHM ELECTRIC CO., LTD.
OHM ELECTRIC

7000-21, Nakagawa, Hosoe, Kita-ku, Hamamatsu, Shizuoka 431-1304, Japan
 TEL +81-53-522-5562 FAX +81-53-523-2362 e-mail : info@ohm.co.jp

URL : <https://www.ohm.jp/>

The contents of this catalog are subject to change for product improvement.
 Colors of products may slightly differ from actual due to printing.